


Arnold Company

(800) 245-7505 ~ (618) 224-7505

“Bully”

Boxcar Plug Door Opener

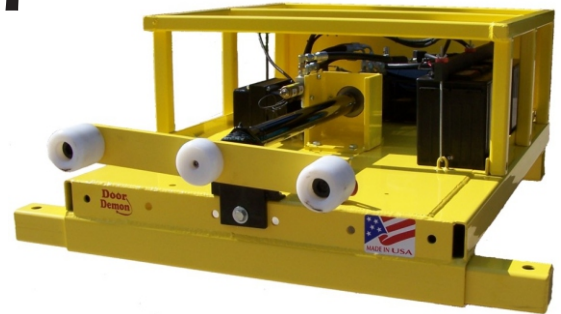

Opener Features:

- Designed to open boxcar plug doors without the danger of physical stress or injury to the operator.
- Operated (via magnetic control module) from the seat of a forklift device
- Powered by two 12-volt batteries which operate a hydraulic pump. The hydraulic pump operates a hydraulic motor which turns the self-adjusting power arm that engages the plug door handle (opens the plug door).
- The self-adjusting power arm rotates at around 20 rpm.
- Since the power arm is self-adjusting (spring-loaded to retract as the plug door opens and extend as the door closes), the forklift will not have to be moved as the plug door opens/closes. Once the plug door is opened, you can use the extended side arm to slide the door open.

NOTE: The extended side arm (or “push bar”) for pushing the boxcar door open will not be effective where the gap between the opener/forklift and the railcar is wide.

IMPORTANT SAFETY FEATURES

Safe, Single-person Operation
Operator Controls Unit from the Safety of the Forklift
Keeps Operator Away from Potential Stored Energy of the Boxcar Plug Handle and Door
Helps Prevent Employee Injuries
Battery Power Disconnect

PHYSICAL SPECIFICATIONS

48” Deep x 36” Wide (base unit without push bar extended) x 20” Tall
Weight: 640 pounds



Arnold Company
2955 Trico Drive
Trenton, Illinois 62293
Fax: (618) 224-7005



www.arnoldcompany.com

sales@arnoldcompany.com